GENLUX

NERGY

POWERING TOMORROW, TODAY



+86-138-8927-0147

jeff@genluxenergy.com


Website: www.genluxenergy.com .

A-M29 & M30, 2/F, Zhongxing No.1, No.36 Middle Zhongxing Avenue,
Guzhen Town, Zhongshan City, Guangdong Province, P.R.China

SOLAR ACCU





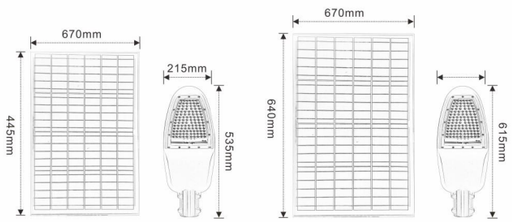

PRODUCT PARAMETERS

Model	GL88150W	GL88200W	GL88150WGC	GL88200WGC
Control Mode	Light Control+ Remote Control			
Solar Panel	MONO(6V/35W)	MONO(6V/50W)	MONO(6V/50W)	MONO(6V/72W)
Battery	LiFe PO4- 3.2V / 3.2V/36000mAH	LiFe PO4- 3.2V / 3.2V/48000mAH	LiFe PO4- 3.2V / 3.2V/48000mAH	LiFe PO4- 3.2V / 3.2V/60000mAH
Led Chip	110pcs 3030	163pcs 3030	110pcs 3030	163pcs 3030
Material	Die-Casting Aluminum			
IP Rate	IP65	IP65	IP65	IP65
Charging Time	4-6H	4-6H	4-6H	4-6H
Color Temperature	7500K	7500K	7500K	7500K
Lamp Size	535*215*90mm	615*245*90mm	535*215*90mm	615*245*90mm
Solar Panel Size	580*350*17mm	670*445*25mm	670*445*25mm	670*640*25mm
Installation Height	4-5M	4-6M	4-6M	5-7M
Irradiation Area	160m²	200m²	160m²	200m²

SOLAR ACCU







PRODUCT PARAMETERS

Model	GL79100W	GL79150W	GL79180W	GL79300W
Control Mode	Light Control+ Remote Control			
Solar Panel	MONO(6V/25W)	MONO(6V/30W)	MONO(6V/35W)	MONO(6V/50W)
Battery	LiFe PO4- 3.2V/ 3.2V/20000mAH	LiFe PO4- 3.2V/ 3.2V/25000mAH	LiFe PO4- 3.2V/ 3.2V/30000mAH	LiFe PO4- 3.2V/ 3.2V/40000mAH
Led Chip	280pcs 5730	300pcs 5730	363pcs 5730	484pcs 5730
Material	Aluminum + Tempered Glass			
IP Rate	IP65	IP65	IP65	IP65
Charging Time	4-6H	4-6H	4-6H	4-6H
Color Temperature	3000-7500K	3000-7500K	3000-7500K	3000-7500K
Lamp Size	590*210*45mm	590*210*45mm	590*210*45mm	640*235*45mm
Solar Panel Size	450*350*17mm	530*350*17mm	580*350*17mm	670*445*25mm
Installation Height	4-5M	4-5M	5-6M	6-7M
Irradiation Area	100m²	120m²	150m²	200m²


SOLAR ACCU






Optical sensing

SMD 2835 incl.
3.2V 640/936PCS





PRODUCT PARAMETERS

Model	GL79200W	GL79400W
Control Mode	Light Control+ Remote Control	
Solar Panel	MONO(6V/35W)	MONO(6V/50W)
Battery	LiFe PO4- 3.2V / 3.2V/36000mAH	LiFe PO4- 3.2V / 3.2V/48000mAH
Led Chip	640pcs 2835	936pcs 2835
Material	Aluminum + Tempered Glass	
IP Rate	IP65	IP65
Charging Time	4-6H	4-6H
Color Temperature	3000-7500K	3000-7500K
Lamp Size	590*210*45mm	640*235*45mm
Solar Panel Size	580*350*17mm	670*445*25mm
Installation Height	5-6M	6-7M
Irradiation Area	160m²	200m²


SOLAR ACCU





Optical sensing

SMD 5730 incl.
3.2V 100/1248PCS

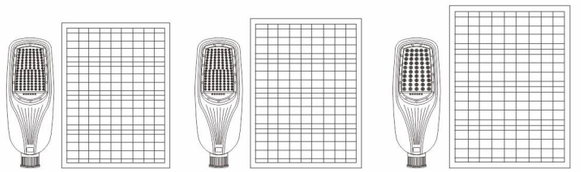

PRODUCT PARAMETERS

Model	GL90200W	GL90300W	GL90400W	GL90500W	GL90600W
Control Mode	Light Control+ Remote Control				
Solar Panel	MONO(6V/50W)	MONO(6V/60W)	MONO(6V/80W)	MONO(6V/120W)	MONO(6V/160W)
Battery	3.2V,45000mAh	3.2V,60000mAh	3.2V,90000mAh	3.2V,120000mAh	3.2V,240000mAh
Led Chip	90pcs 5054	30pcs 7070	120pcs 5054	120pcs 5054	50pcs 7070
Material	Aluminum + Optical Lens				
IP Rate	IP65	IP65	IP65	IP65	IP65
Charging Time	4-6H	4-6H	4-6H	4-6H	4-6H
Color Temperature	3500K/7500K	3500K/7500K	3500K/7500K	3500K/7500K	3500K/7500K
Lamp Size	665*251*106mm	665*251*106mm	765*310*106mm	765*310*106mm	765*310*106mm
Solar Panel Size	770*390*17 mm	850*390*25 mm	770*580*25 mm	1100*580*25 mm	770*580*25 mm*2
Installation Height	5-7M	6-7M	6-8M	7-9M	8-12M
Irradiation Area	90m²	120m²	150m²	200m²	260m²

SOLAR ACCU






Optical sensing

SMD 2835 incl.
3.2V 640/936PCS

PRODUCT PARAMETERS

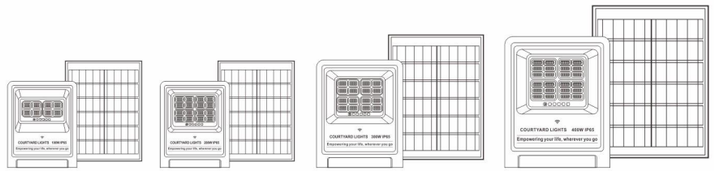

Model	GL60100W	GL60200W	GL60300W	GL60400W
Control Mode	Automatic Light Control +remotecontrol			
Solar Panel	MONO(5V/15W)	MONO(6V/20W)	MONO(6V/35W)	MONO(6V/50W)
Battery	3.2V12000mAh	3.2V,18000mAh	3.2V,30000mAh	3.2V,450000mAh
Led Chip	48pcs 5730	96pcs 5730	128pcs 5730	288pcs 5730
Material	Aluminum + Ttempered Glass			
IP Rate	IP65	IP65	IP65	IP65
Charging Time	4-5H	4-6H	5-7H	6-8H
Color Temperature	3000-7500K	3000-7500K	3000-7500K	3000-7500K
Lamp Size	245*198*60mm	286*260*60mm	310*260*60mm	375*315*60mm
Solar Panel Size	230*390*17 mm	300*390*17 mm	510*390*17 mm	700*390*17 mm
Installation Height	3-4M	3-4M	4-5M	5-6M
Irradiation Area	120m²	150m²	200m²	300m²

SOLAR ACCU






Optical sensing


SMD 5730 incl.
3.2V 100/1248PCS


PRODUCT PARAMETERS

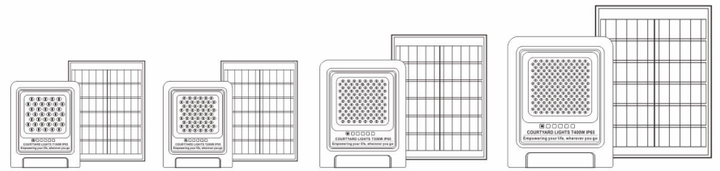

Model	GL60T100W	GL60T200W	GL60T300W	GL60T400W
Control Mode	Automatic Light Control +remotecontrol			
Solar Panel	MONO(5V/15W)	MONO(6V/20W)	MONO(6V/35W)	MONO(6V/50W)
Battery	3.2V12000mAh	3.2V,18000mAh	3.2V,30000mAh	3.2V,450000mAh
Led Chip	38pcs 5054	58pcs 5054	110pcs 5054	178pcs 5054
Material	Aluminum + Ttempered Glass			
IP Rate	IP67	IP67	IP67	IP67
Charging Time	4-5H	4-6H	5-7H	6-8H
Color Temperature	3000-7500K	3000-7500K	3000-7500K	3000-7500K
Lamp Size	245*198*60mm	286*260*60mm	310*260*60mm	375*315*60mm
Solar Panel Size	230*390*17 mm	300*390*17 mm	510*390*17 mm	700*390*17 mm
Installation Height	3-4M	3-4M	4-5M	5-6M
Irradiation Area	120m²	150m²	200m²	300m²



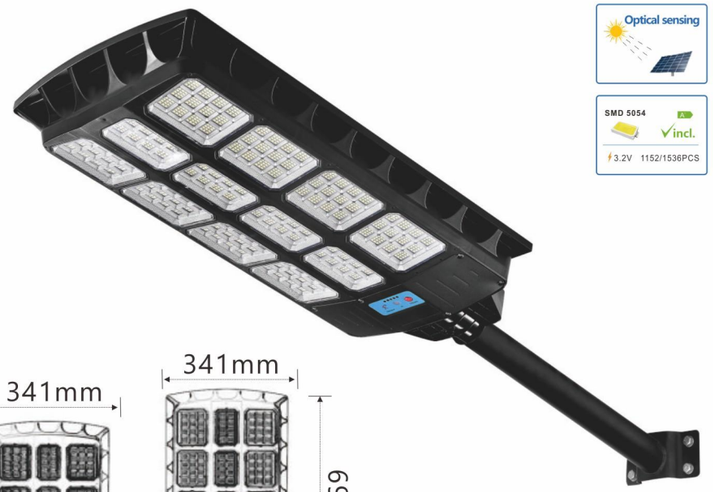


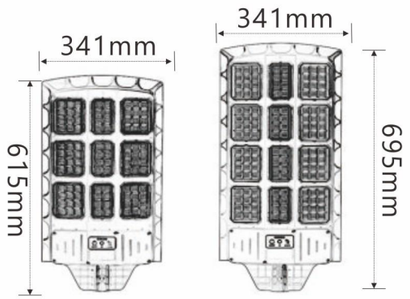


PRODUCT PARAMETERS

Model	GL19400W	GL19600W
Control Mode	Light Control+ Remote Control / Radar Sensing	
Solar Panel	MONO(5V/26W)	MONO(5V/30W)
Battery	LiFe PO4- 3.2V/24000mAh	LiFe PO4- 3.2V/30000mAh
Led Chip	1152 pcs 2835	1536 pcs 2835
Material	ABS Engineering Plastic	
IP Rate	IP65	IP65
Charging Time	4-6H	4-6H
Color Temperature	3000-7500K	3000-7500K
Lamp Size	615*341*74mm	695*341*74mm
Installation Height	4-6M	4-7M
Irradiation Area	150m²	170m²



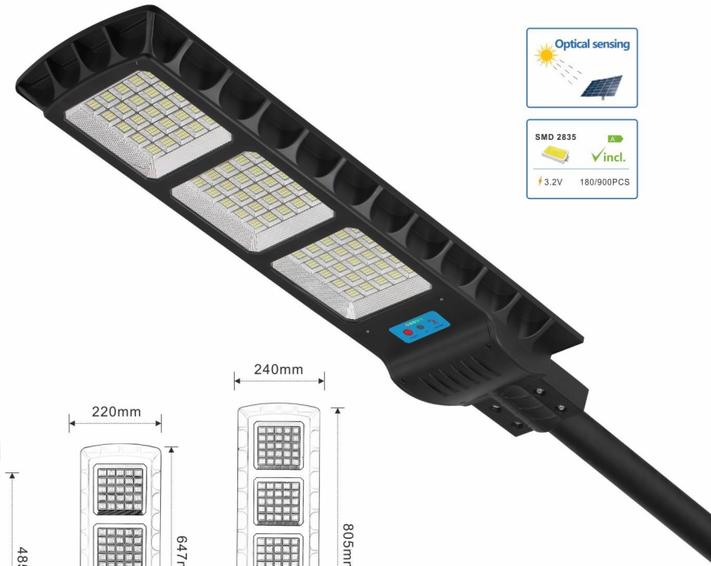



PRODUCT PARAMETERS


Model	GL19100W	GL19200W	GL19300W
Control Mode	Light Control+ Remote Control / Radar Sensing		
Solar Panel	MONO(5V/12W)	MONO(5V/18W)	MONO(5V/25W)
Battery	LiFe PO4- 3.2V/ 3.2V/12000mAH	LiFe PO4- 3.2V/ 3.2V/18000mAH	LiFe PO4- 3.2V/ 3.2V/24000mAH
Led Chip	300 pcs 2835	600 pcs 2835	900 pcs 2835
Material	ABS Engineering Plastic		
IP Rate	IP65	IP65	IP65
Charging Time	4-6H	4-6H	4-6H
Color Temperature	3000-7500K	3000-7500K	3000-7500K
Lamp Size	485*220*70mm	674*220*70mm	805*240*70mm
Installation Height	4-5M	4-5M	5-6M
Irradiation Area	70m²	100m²	130m²

GENLUX ENERGY
POWERING TOMORROW, TODAY

SOLAR ACCU








PRODUCT PARAMETERS

Model	GL17300W	GL17400W
Control Mode	Light Control+ Remote Control+Radar Sensing	
Solar Panel	MONO(5V/22W)	MONO(5V/28W)
Battery	LiFe PO4-3.2V/24000mAh	LiFe PO4-3.2V/30000mAh
Led Chip	78PCS-5054	104PCS-5054
Material	Abs Engineering Plastic+ Optical Lens	
IP Rate	IP 65	IP 65
Charging Time	4-5H	4-5H
Color Temperature	3000K-7500k	3000K-7500k
Lamp Size	695*234*61.5mm	815*234*61.5mm
Installation Height	4-6M	5-7M
Irradiation Area	150m²	180m²

SOLAR ACCU








PRODUCT PARAMETERS

Model	GL16300W	GL16400W
Control Mode	Light Control+ Remote Control+Radar Sensing	
Solar Panel	5V/22W	5V/28W
Battery	LiFe PO4-3.2V/24000mAh	LiFe PO4-3.2V/30000mAh
Led Chip	54PCS-5054	72PCS-5054
Material	Abs Engineering Plastic+ Optical Lens	
IP Rate	IP 65	IP 65
Charging Time	4-5h	4-5h
Color Temperature	3000K-7500k	3000K-7500k
Lamp Size	707*266*60mm	830*266*60mm
Installation Height	4-6M	5-7M
Irradiation Area	150m²	180m²

GENLUX ENERGY
POWERING TOMORROW, TODAY

SOLAR ACCU








PRODUCT PARAMETERS

Model	GL70400W	GL70500W
Control Mode	Light Control+ Remote Control	
Solar Panel	MONO(5V/35W)	MONO(5V/50W)
Battery	LiFe PO4-3.2V/36000mAh	LiFe PO4-3.2V/48000mAh
Led Chip	72PCS-5054	96PCS-5054
Material	Die - Casting Aluminum+ Optical Lens	
IP Rate	IP 65	IP 65
Radar Sensing	YES	YES
Charging Time	4-6H	4-6H
Color Temperature	3000-7500K	3000-7500K
Lamp Size	710*350*61.5mm	890*350*61.5mm
Installation Height	5-6M	5-7M
Irradiation Area	200m^2	280m^2

SOLAR ACCU








PRODUCT PARAMETERS

Model	GLF70400W	GLF70500W
Control Mode	Light Control+ Remote Control	
Solar Panel	MONO(5V/35W)	MONO(5V/50W)
Battery	LiFe PO4-3.2V/36000mAh	LiFe PO4-3.2V/48000mAh
Led Chip	288PCS-5054	384PCS-5054
Material	Die - Casting Aluminum+ Optical Lens	
IP Rate	IP 65	IP 65
Radar Sensing	YES	YES
Charging Time	4-6H	4-6H
Color Temperature	3000-7500K	3000-7500K
Lamp Size	710*350*61.5mm	890*350*61.5mm
Installation Height	5-6M	5-7M
Irradiation Area	200m^2	280m^2

SOLAR ACCU







Optical sensing

SMD 2835 incl.

3.2V 600/900PCS

PRODUCT PARAMETERS

Model	GL68200W	GL68300W
Control Mode	Light Control+ Remote Control+Radar Sensing	
Solar Panel	MONO(5V/18W)	MONO(5V/25W)
Battery	LiFe PO4- 3.2V/ 3.2V/18000mAH	LiFe PO4- 3.2V/ 3.2V/24000mAH
Led Chip	600pcs 2835	900pcs 2835
Material	Aluminum	
IP Rate	IP 65	IP 65
Charging Time	4-6H	4-6H
Color Temperature	3000-7500K	3000-7500K
Lamp Size	674*220*70mm	805*240*70mm
Installation Height	4-5M	5-6M
Irradiation Area	100m²	130m²

SOLAR ACCU





Optical sensing

SMD 5054 incl.

3.2V 44/110 PCS

PRODUCT PARAMETERS

Model	GLTY78100W	GLTY78150W	GLTY78200W	GLTY78300W
Control Mode	Light Control+ Remote Control			
Solar Panel	MONO(5V/23W)	MONO(5V/30W)	MONO(5V/33W)	MONO(5V/40W)
Battery	LiFe PO4-3.2V/ 24000mAh	LiFe PO4-3.2V/ 30000mAh	LiFe PO4-3.2V/ 36000mAh	LiFe PO4-3.2V/ 42000mAh
Led Chip	44PCS SMD 5054	66PCS SMD 5054	88PCS SMD 5054	110PCS SMD 5054
Material	Aluminum Die - Casting+ Optical Lens			
IP Rate	IP 65	IP 65	IP 65	IP 65
Radar Sensing	YES	YES	YES	YES
Charging Time	4-6h	4-6h	4-6h	4-6h
Color Temperature	3000-7500K	3000-7500K	3000-7500K	3000-7500K
Lamp Size	750*237*48mm	900*237*48mm	1000*237*48mm	1150*237*48mm
Installation Height	3-4M	4-5M	5-6M	6-7M
Irradiation Area	200m²	240m²	300m²	360m²

GENLUX ENERGY
POWERING TOMORROW, TODAY

SOLAR ACCU





Optical sensing


SMD 5054 incl.
3.2V 90/225 PCS

PRODUCT PARAMETERS

Model	GL78100W	GL78150W	GL78200W	GL78300W
Control Mode	Light Control+ Remote Control			
Solar Panel	MONO(5V/23W)	MONO(5V/30W)	MONO(5V/33W)	MONO(5V/40W)
Battery	LiFe PO4-3.2V/ 24000mAh	LiFe PO4-3.2V/ 30000mAh	LiFe PO4-3.2V/ 36000mAh	LiFe PO4-3.2V/ 42000mAh
Led Chip	90PCS SMD 5054	135PCS SMD 5054	180PCS SMD 5054	225PCS SMD 5054
Material	Aluminum + Optical Lens			
IP Rate	IP 65	IP 65	IP 65	IP 65
Charging Time	YES	YES	YES	YES
Color Temperature	4-6h	4-6h	4-6h	4-6h
Lamp Size	3000-7500K	3000-7500K	3000-7500K	3000-7500K
Solar Panel Size	750*237*82mm	900*237*82mm	1000*237*82mm	1150*237*82mm
Installation Height	3-4M	4-5M	5-6M	6-7M
Irradiation Area	200m²	240m²	300m²	360m²

SOLAR ACCU



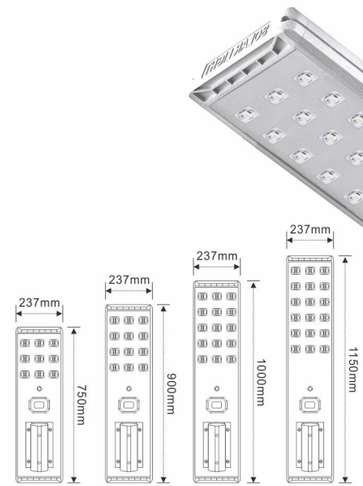



Optical sensing

SMD 5054 incl.
3.2V 54/108 PCS

PRODUCT PARAMETERS

Model	GLMT78100W	GLMT78150W	GLMT78200W	GLMT78300W
Control Mode	Light Control+ Remote Control			
Solar Panel	MONO(5V/23W)	MONO(5V/30W)	MONO(5V/33W)	MONO(5V/40W)
Battery	LiFe PO4-3.2V/ 24000mAh	LiFe PO4-3.2V/ 30000mAh	LiFe PO4-3.2V/ 36000mAh	LiFe PO4-3.2V/ 42000mAh
Led Chip	54PCS SMD 5054	72PCS SMD 5054	90PCS SMD 5054	108PCS SMD 5054
Material	Aluminum Die - Casting+ Optical Lens			
IP Rate	IP 65	IP 65	IP 65	IP 65
Charging Time	YES	YES	YES	YES
Color Temperature	4-6h	4-6h	4-6h	4-6h
Lamp Size	3000-7500K	3000-7500K	3000-7500K	3000-7500K
Solar Panel Size	750*237*82mm	900*237*82mm	1000*237*82mm	1150*237*82mm
Installation Height	3-4M	4-5M	5-6M	6-7M
Irradiation Area	200m²	240m²	300m²	360m²

SOLAR ACCU





PRODUCT PARAMETERS

Model	GL28S300W	GL28S400W	GL28S500W	GL28S600W	GL28SPRO500W	GL28SPRO600W
Control Mode	Automatic Light Control +Remote Control					
Solar Panel	MONO (6V/60W)	MONO (18V/80W)	MONO (18V/100W)	MONO (18V/120W)	MONO (18V/100W)	MONO (18V/120W)
Battery	60000mAh	90000mAh	105000mAh	120000mAh	12.8V 45AH 576Wh	12.8V 60AH 768Wh
Led Chip	180pcs 5054	240pcs 5054	300pcs 5054	360pcs 5054	300pcs 5054	360pcs 5054
Material	Aluminum + Optical Lens					
IP Rate	IP67	IP67	IP67	IP67	IP67	IP67
Charging Time	4-6H	4-6H	4-6H	4-6H	4-6H	4-6H
Lumen:	5521lm	6105lm	7150lm	8250lm	8500lm	10000lm
Color Temperature	7500K	7500K	7500K	7500K	7500K	7500K
Lamp Size	960*440*55mm	1190*440*55mm	1440*440*55mm	1710*440*55mm	1440*440*55mm	1710*440*55mm
Solar Panel Size	877*397mm	1107*397mm	1357*397mm	1627*397mm	1357*397mm	1627*397mm
Installation Height	4-6M	4-6M	5-7M	6-8M	6-8M	6-8M
Irradiation Area	460m²	520m²	600m²	700m²	800m²	1000m²


SOLAR ACCU





PRODUCT PARAMETERS

Model	GL20300W	GL20400W	GL20500W
Control Mode	Light Control + Infrared Sensor		
Solar Panel	MONO(5V45W)	MONO(5V/65W)	MONO(5V/85W)
Battery	LiFe PO4- 3.2V/ 3.2V/48000mAH	LiFe PO4- 3.2V/ 3.2V/60000mAH	LiFe PO4- 3.2V/ 3.2V/84000mAH
Led Chip	180pcs 3030	240pcs 3030	300pcs 3030
Material	Aluminum + Optical Lens		
IP Rate	IP 65	IP 65	IP 65
Charging Time	Solar Charging,6 to 8hours		
Discharging Time	4 to 5 Rainy Days		
Lamp Size	810*345*55mm	1080*345*55mm	1380*380*55mm
Installation Height	6-7M	6-7M	7-8M
Irradiation Area	300m²	380m²	460m²

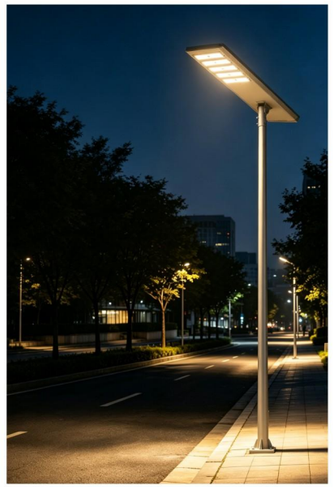




PRODUCT PARAMETERS

Model	GL78S150W	GL78S200W	GL78S300W	GL78S350W
Control Mode	Automatic Light Control +Remote Control			
Solar Panel	MONO(5V30W)	MONO(5V/35W)	MONO(5V/40W)	MONO(5V/45W)
Battery	30000mAh	36000mAh	42000mAh	48000mAh
Led Chip	120pcs 5054	160pcs 5054	200pcs 5054	240pcs 5054
Material	Aluminum + Optical Lens			
IP Rate	IP67	IP67	IP67	IP67
Charging Time	4-5H	4-6H	4-6H	4-6H
Lumen:	3150lm	3600lm	4000lm	4550lm
Color Temperature	7500K	7500K	7500K	7500K
Lamp Size	900*275*55mmm	900*275*55mmm	1200*275*55mm	1300*275*55mm
Solar Panel Size	818*232mm	968*232mm	1118*232mm	1200*232mm
Installation Height	4-6M	4-6M	5-7M	6-8M
Irradiation Area	240m²	300m²	360m²	400m²



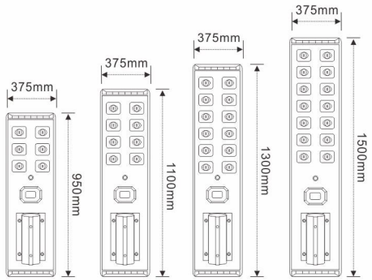



PRODUCT PARAMETERS

Model	GLTY78300W	GLTY78400W	GLTY78500W	GLTY78600W
Control Mode	Light Control+ Remote Control			
Solar Panel	MONO(5V/55W)	MONO(5V/70W)	MONO(5V/80W)	MONO(5V/90W)
Battery	LiFe PO4-3.2V/ 54000mAh	LiFe PO4-3.2V/ 60000mAh	LiFe PO4-3.2V/ 72000mAh	LiFe PO4-3.2V/ 84000mAh
Led Chip	60PCS SMD 5054	80PCS SMD 5054	120PCS SMD 5054	140PCS SMD 5054
Material	Aluminum Die - Casting+ Optical Lens			
IP Rate	IP 65	IP 65	IP 65	IP 65
Charging Time	YES	YES	YES	YES
Color Temperature	4-6h	4-6h	4-6h	4-6h
Lamp Size	3000-7500K	3000-7500K	3000-7500K	3000-7500K
Solar Panel Size	950*375*82mm	1100*375*82mm	1300*375*82mm	1500*375*82mm
Installation Height	6-7M	7-8M	8-9M	9-10M
Irradiation Area	460m²	520m²	580m²	640m²

GENLUX ENERGY
POWERING TOMORROW, TODAY

SOLAR ACCU





Optical sensing


SMD 5054 incl.
3.2V 180/540 PCS

PRODUCT PARAMETERS

Model	GL28200W	GL28300W	GL28400W	GL28500W	GL28600W
Control Mode	Light Control+ Remote Control				
Solar Panel	MONO (5V/45W)	MONO (5V/55W)	MONO (5V/70W)	MONO (5V/80W)	MONO(5V/90W)
Battery	LiFe PO4-3.2V/ 48000mAh	LiFe PO4-3.2V/ 54000mAh	LiFe PO4-3.2V/ 60000mAh	LiFe PO4-3.2V/ 72000mAh	LiFe PO4-3.2V/ 84000mAh
Led Chip	180PCS SMD 5054	270PCS SMD 5054	360PCS SMD 5054	450PCS SMD 5054	540PCS SMD 5054
Material	Aluminum + Optical Lens				
IP Rate	IP 65	IP 65	IP 65	IP 65	IP 65
Radar Sensing	YES	YES	YES	YES	YES
Charging Time	4-6H	4-6H	4-6H	4-6H	4-6H
Color Temperature	3000-7500K	3000-7500K	3000-7500K	3000-7500K	30007500K
Lamp Size	800*375*82mm	950*375*82mm	1100*375*82mm	1300*375*82mm	1500*375*82mm
Installation Height	6-7M	6-7M	7-8M	8-9M	9-10M
Irradiation Area	400m²	460m²	520m²	580m²	640m²

SOLAR ACCU



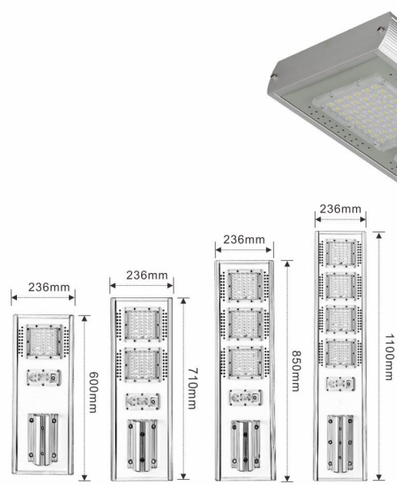



Optical sensing


SMD 3030 incl.
3.2V 50/200PCS


PRODUCT PARAMETERS

Model	GL7750W	GL77100W	GL77150W	GL77200W
Control Mode	Light Control+ Remote Control/Radar Sensing			
Solar Panel	MONO(5V/20W)	MONO(5V/23W)	MONO(5V/30W)	MONO(5V/40W)
Battery	LiFe PO4- 3.2V/ 3.2V/18000mAH	LiFe PO4- 3.2V/ 3.2V/24000mAH	LiFe PO4- 3.2V/ 3.2V/30000mAH	LiFe PO4- 3.2V/ 3.2V/36000mAH
Led Chip	50PCS 3030	100PCS 3030	150PCS 3030	200PCS 3030
Material	Aluminum + Optical Lens			
IP Rate	IP 65	IP 65	IP 65	IP 65
Charging Time	4-6h	4-6h	4-6h	4-6h
Color Temperature	3000-7500K	3000-7500K	3000-7500K	3000-7500K
Lamp Size	595*210*55mm	675*210*55mm	845*210*55mm	1095*210*55mm
Installation Height	4-5M	4-5M	5-6M	6-7M
Irradiation Area	100m²	130m²	160m²	200m²

SOLAR ACCU



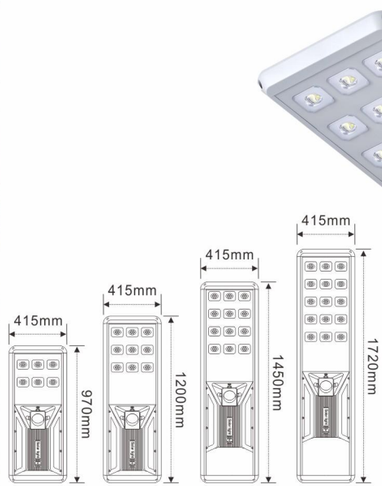

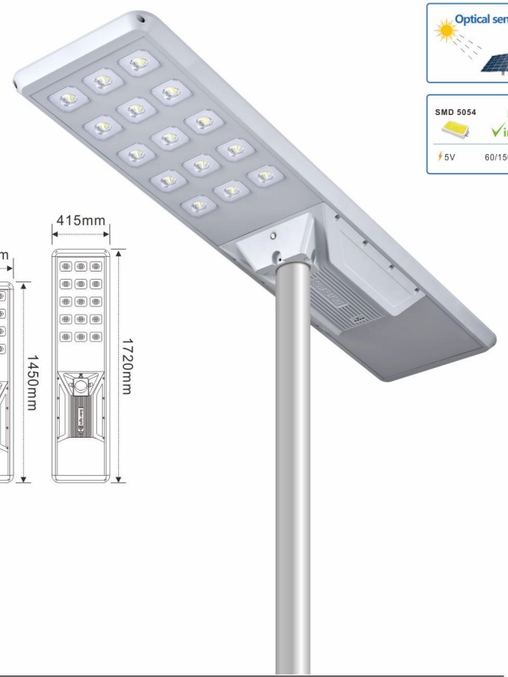


PRODUCT PARAMETERS


Model	GLTY80200W	GLTY80300W	GLTY80400W(MPPT)	GLTY80500W(MPPT)
Control Mode	Light Control+ Remote Control			
Solar Panel	MONO(6V/65W)	MONO(6V/85W)	MONO(18V/100W)	MONO(18V/120W)
Battery	LiFe PO4 3.2V/72000mAh	LiFe PO4 3.2V/96000mAh	LiFe Po4 3.2V/120000mAh	LiFe PO4 3.2V/144000mAh
Led Chip	60PCS SMD 5054	90PCS SMD 5054	120PCS SMD 5054	150PCS SMD 5054
Material	Aluminum Die - Casting+Optical Lens			
IP Rate	IP 65	IP 65	IP 65	IP 65
Radar Sensing	YES	YES	YES	YES
Charging Time	4-6h	4-6h	4-6h	4-6h
Color Temperature	3000-7500K	3000-7500K	3000-7500K	3000-7500K
Lamp Size	970*415*130mm	1200*415*130mm	1450*415*130mm	1720*415*130mm
Installation Height	6-7M	6-8M	7-10M	8-12M
Irradiation Area	400m²	500m²	600m²	700m²

SOLAR ACCU



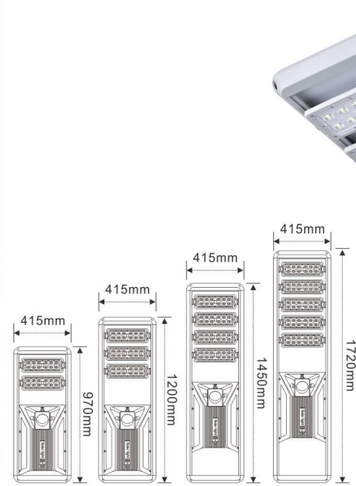







PRODUCT PARAMETERS

Model	GLMZ80200W	GLMZ80300W	GLMZ80400W(MPPT)	GLMZ80500W(MPPT)
Control Mode	Light Control+ Remote Control			
Solar Panel	6V/65W	6V/85W	18/V/100W	18V/120W
Battery	LiFe PO4 3.2V/72000mAh	LiFe PO4 3.2V/96000mAh	LiFe PO4 3.2V/120000mAh	LiFe PO4 3.2V/144000mAh
Led Chip	48PCS SMD 5054	72PCS SMD 5054	96PCS SMD 5054	120PCS SMD 5054
Material	Aluminum Die - Casting+ Optical Lens			
IP Rate	IP 65	IP 65	IP 65	IP 65
Radar Sensing	YES	YES	YES	YES
Charging Time	4-6h	4-6h	4-6h	4-6h
Color Temperature	3000-7500K	3000-7500K	3000-7500K	3000-7500K
Lamp Size	970*415*130mm	1200*415*130mm	1450*415*130mm	1720*415*130mm
Installation Height	6-7M	6-8M	7-10M	8-12M
Irradiation Area	400m²	500m²	600m²	700m²





PRODUCT PARAMETERS


Model:	GL60W	GL100W	GL200W	GL300W	GL400W
Control Mode:	Light Control+ Remote Control				
Solar Panel:	5V/18W	5V/25W	5V/35W	5V/40W	5V/50W
Battery:	3.2V 10000mAh	3.2V 15000mAh	3.2V 20000mAh	3.2V 25000mAh	3.2V 30000mAh
Led Chip:	SMD/277PCS	SMD/277PCS	SMD/352PCS	SMD/352PCS	SMD/352PCS
Material:	Aluminum Die-Casting+Optical Lens				
IP Rate:	IP65				
Radar Sensing:	YES				
Charging Time:	4-6h				
Color Temperature:	3000-7500K				
Lamp Size:	465x210x70mm	465x210x70mm	525x240x70mm	525x240x70mm	525x240x70mm
Installation Height:	6-7M				
Irradiation Area:	60m²	80m²	100m²	150m²	200m²





PRODUCT PARAMETERS


Model:	GLD60W	GLD100W	GLD200W	GLD300W	GLD400W
Control Mode:	Light Control+ Remote Control				
Solar Panel:	5V/18W	5V/25W	5V/35W	5V/40W	5V/50W
Battery:	3.2V/10000mAh	3.2V/15000mAh	3.2V/20000mAh	3.2V/25000mAh	3.2V/30000mAh
Led Chip:	SMD/80PCS	SMD/80PCS	SMD/92PCS	SMD/92PCS	SMD/92PCS
Material:	Aluminum Die-Casting+Optical Lens				
IP Rate:	IP65				
Radar Sensing:	YES				
Charging Time:	4-6h				
Color Temperature:	3000-7500K				
Lamp Size:	465x210x70mm	465x210x70mm	525x240x70mm	525x240x70mm	525x240x70mm
Installation Height:	6-7M				
Irradiation Area:	60m²	80m²	100m²	150m²	200m²

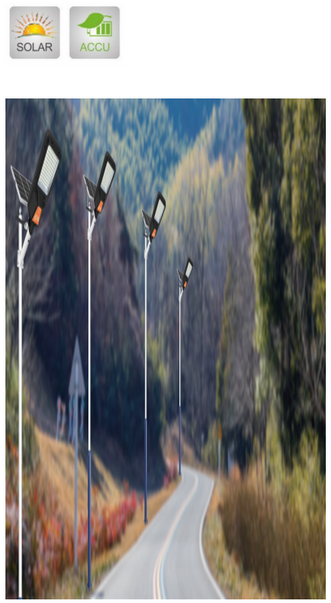



PRODUCT PARAMETERS

Model:	GL-TM60W	GL-TM100W	GL-TM200W	GL-TM300W	GL-TM400W
Control Mode:	Light Control+ Remote Control				
Solar Panel:	5V/18W	5V/25W	5V/35W	5V/40W	5V/50W
Battery:	3.2V 100000mAh	3.2V 150000mAh	3.2V 200000mAh	3.2V 250000mAh	3.2V 300000mAh
Led Chip:	SMD / 170PCS	SMD / 170PCS	SMD / 210PCS	SMD / 210PCS	SMD / 210PCS
Material:	Aluminum Die-Casting+Optical Lens				
IP Rate:	IP65				
Radar Sensing:	YES				
Charging Time:	4-6h				
Color Temperature:	3000-7500K				
Lamp Size:	385×290×15mm	339×388×15mm	385×520×15mm	385×630×15mm	438×658×20mm
Installation Height:	6-7M				
Irradiation Area:	60㎡	80㎡	100㎡	150㎡	200㎡

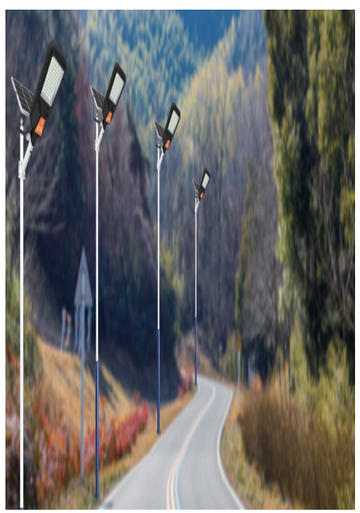




PRODUCT PARAMETERS

Model:	GLTMD60W	GLTM100W	GLTM200W	GLTM300W	GLTM400W
Control Mode:	Light Control+ Remote Control				
Solar Panel:	5V/18W	5V/25W	5V/35W	5V/40W	5V/50W
Battery:	3.2V 100000mAh	3.2V 150000mAh	3.2V 200000mAh	3.2V 250000mAh	3.2V 300000mAh
Led Chip:	SMD / 62PCS	SMD / 62PCS	SMD / 69PCS	SMD / 69PCS	SMD / 69PCS
Material:	Aluminum Die-Casting+Optical Lens				
IP Rate:	IP65				
Radar Sensing:	YES				
Charging Time:	4-6h				
Color Temperature:	3000-7500K				
Lamp Size:	385×290×15mm	339×388×15mm	385×520×15mm	385×630×15mm	438×658×20mm
Installation Height:	6-7M				
Irradiation Area:	60㎡	80㎡	100㎡	150㎡	200㎡

GENLUX ENERGY
POWERING TOMORROW, TODAY





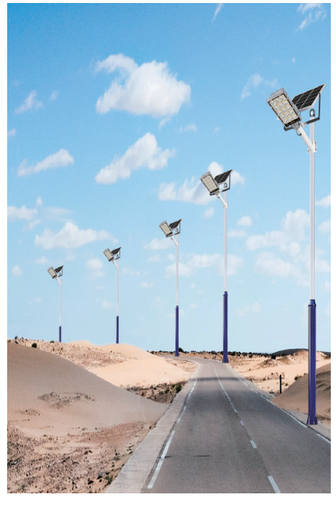



PRODUCT PARAMETERS

Model:	GL-100	GL-200W	GL-300W	GL-400W
Control Mode:	Light Control+ Remote Control			
Solar Panel:	5V/25W	5V/35W	5V/40W	5V/50W
Battery:	3.2V 15000mAh	3.2V 20000mAh	3.2V 25000mAh	3.2V 30000mAh
Led Chip:	SMD / 196PCS	SMD / 196PCS	SMD / 378PCS	SMD / 378PCS
Material:	Aluminum Die-Casting+Optical Lens			
IP Rate:	IP65			
Radar Sensing:	YES			
Charging Time:	4-6h			
Color Temperature:	3000-7500K			
Lamp Size:	340×390×17mm	350×520×17mm	350×630×17mm	440×660×17mm
Installation Height:	6-7M			
Irradiation Area:	80㎡	100㎡	150㎡	200㎡

PRODUCT PARAMETERS

Model:	GLM500W	GLM600W	GLM800W
Control Mode:	Light Control+ Remote Control		
Solar Panel:	5V/35W	5V/40W	5V/50W
Battery:	3.2V 20000mAh	3.2V 25000mAh	3.2V 30000mAh
Led Chip:	SMD / 300PCS	SMD / 360PCS	SMD / 460PCS
Material:	Aluminum Die-Casting+Optical Lens		
IP Rate:	IP65		
Radar Sensing:	YES		
Charging Time:	4-6h		
Color Temperature:	3000-7500K		
Lamp Size:	480×240×78mm	480×240×78mm	480×240×78mm
Installation Height:	6-7M		
Irradiation Area:	100㎡	150㎡	200㎡

GENLUX ENERGY
POWERING TOMORROW, TODAY

SOLAR ACCU






Optical sensing

SMD 5054 A
incl.
5V 48/120PCS

PRODUCT PARAMETERS

Model:	GLM60W	GLM100W	GLM200W	GLM300W	GLM400W
Control Mode:	Light Control+ Remote Control				
Solar Panel:	5V/18W	5V/25W	5V/35W	5V/40W	5V/50W
Battery:	3.2V 10000mAh	3.2V 15000mAh	3.2V 20000mAh	3.2V 25000mAh	3.2V 30000mAh
Led Chip:	SMD / 120PCS	SMD / 168PCS	SMD / 216PCS	SMD / 288PCS	SMD / 360PCS
Material:	Aluminum Die-Casting+Optical Lens				
IP Rate:	IP65				
Radar Sensing:	YES				
Charging Time:	4-6h				
Color Temperature:	3000-7500K				
Lamp Size:	390×185×78mm	390×185×78mm	480×240×78mm	480×240×78mm	480×240×78mm
Installation Height:	6-7M				
Irradiation Area:	60㎡	80㎡	100㎡	150㎡	200㎡

SOLAR ACCU

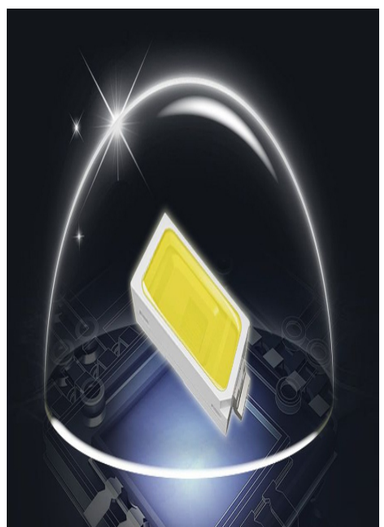

Optical sensing

SMD 5054 A
incl.
5V 48/120PCS



PRODUCT PARAMETERS

Model:	GLMD60W	GLMD100W	GLD200W	GLD300W	GLD400W
Control Mode:	Light Control+ Remote Control				
Solar Panel:	5V/18W	5V/25W	5V/35W	5V/40W	5V/50W
Battery:	3.2V 10000mAh	3.2V 15000mAh	3.2V 20000mAh	3.2V 25000mAh	3.2V 30000mAh
Led Chip:	SMD / 66PCS	SMD / 66PCS	SMD / 120PCS	SMD / 120PCS	SMD / 120PCS
Material:	Aluminum Die-Casting+Optical Lens				
IP Rate:	IP65				
Radar Sensing:	YES				
Charging Time:	4-6h				
Color Temperature:	3000-7500K				
Lamp Size:	390×185×78mm	390×185×78mm	480×240×78mm	480×240×78mm	480×240×78mm
Installation Height:	6-7M				
Irradiation Area:	60㎡	80㎡	100㎡	150㎡	200㎡



PRODUCT PARAMETERS

Model:	GLJ100W	GLJ200W	GLJ300W
Control Mode:	Light Control+ Remote Control		
Solar Panel:	5V/25W	5V/35W	5V/40W
Battery:	3.2V 15000mAh	3.2V 20000mAh	3.2V 25000mAh
Led Chip:	SMD / 150PCS	SMD / 240PCS	SMD / 300PCS
Material:	Aluminum Die-Casting+Optical Lens		
IP Rate:	IP65		
Radar Sensing:	YES		
Charging Time:	4-6h		
Color Temperature:	3000-7500K		
Lamp Size:	340×390×17mm	350×520×17mm	350×630×17mm
Installation Height:	6-7M		
Irradiation Area:	80㎡	100㎡	150㎡




PRODUCT PARAMETERS

Model:	GLK60W	GLK100W	GLK200W	GLK300W	GLK400W
Control Mode:	Light Control+ Remote Control				
Solar Panel:	5V/12W	5V/18W	5V/25W	5V/35W	5V/40W
Battery:	3.2V 10000mAh	3.2V 14000mAh	3.2V 18000mAh	3.2V 22000mAh	3.2V 27500mAh
Led Chip:	SMD / 300PCS	SMD / 300PCS	SMD / 300PCS	SMD / 300PCS	SMD / 300PCS
Material:	Aluminum Die-Casting+Optical Lens				
IP Rate:	IP65				
Radar Sensing:	YES				
Charging Time:	4-6h				
Color Temperature:	3000-7500K				
Lamp Size:	340×290×17mm	340×390×17mm	350×390×17mm	350×530×17mm	350×630×17mm
Installation Height:	6-7M				
Irradiation Area:	80㎡	80㎡	100㎡	150㎡	200㎡

GENLUX ENERGY
POWERING TOMORROW, TODAY

SOLAR ACCU



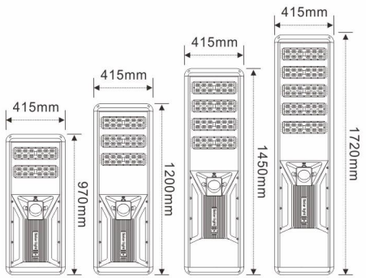



PRODUCT PARAMETERS

Model	GL80200W	GL80300W	GL80400W(MPPT)	GL80500W(MPPT)
Control Mode	Light Control+ Remote Control			
Solar Panel	MONO(6V/65W)	MONO(6V/85W)	MONO(18V/100W)	MONO(18V/120W)
Battery	LiFe PO4 3.2V/72000mAh	LiFe PO4 3.2V/96000mAh	LiFe PO4 3.2V/120000mAh	LiFe PO4 3.2V/144000mAh
Led Chip	48PCS SMD 5054	72PCS SMD 5054	96PCS SMD 5054	120PCS SMD 5054
Material	Aluminum Die - Casting+Optical Lens			
IP Rate	IP 65	IP 65	IP 65	IP 65
Radar Sensing	YES	YES	YES	YES
Charging Time	4-6h	4-6h	4-6h	4-6h
Color Temperature	3000-7500K	3000-7500K	3000-7500K	3000-7500K
Lamp Size	970*415*130mm	1200*415*130mm	1450*415*130mm	1720*415*130mm
Installation Height	6-7M	6-8M	7-10M	8-12M
Irradiation Area	400m²	500m²	600m²	700m²

Solar charging

Home Adapter Charging









GL-F3 16inches



LED Lighting supply



Phone charging

PRODUCT PARAMETERS

Power: 25w	Gear position: 6 gears
Motor: Brushless motor	Charging time: 4-6H
Solar panel: 15V/20w Monocrystalline silicon	Usage time: 7-10H
Solar panel size: 350*400mm	Working mode: multi-function button+remote control
Battery capacity: ternary lithium battery 7.4V/8*3000mAh	Function mode: remote control or button control, charging indicator light, gear display, USB+Type-C charging interface , emergency bulb charging interface,+mosquito light,timing function
RPM:1200	
Max Speed:4.5m/s	Product color: white+black
Charger: 4A adapter charger	Fan size: 16 inches, height 120cm, width 50cm

GENLUX
NERGY
POWERING TOMORROW, TODAY

Solar charging Home Adapter Charging











LED Lighting supply



Phone charging

GL-WS-160A/160B 16inches

PRODUCT PARAMETERS

Power: 25w	Working mode: multi-function button+remote control
Motor: brushed motor ／ Brushless motor	Function mode: charging indicator light, USB and Type-C /digital display/night light
Fan Blade: 5-Blade ABS	
Battery capacity: Lead acid power plant12V/4500mAh Ternary lithium battery 11.1V/9*3000mA	Product Configuration: 5V/LED Bulb + Remote Control +power adapter
Solar panel: mono 15V/20w 350*400mm	Charging time: 4-6H
RPM:1300RPM	Usage time: 4-10H
Max Speed:5.0m/s	Fan size: 16 inches, height 125m, width 42cm
Gear position: 9 gearst	Product color: ORG/green/black

Solar charging Home Adapter Charging











LED Lighting supply



Phone charging

GL-198F 16/18inches

PRODUCT PARAMETERS

Power: 20w / 25w	Gear position: 3 gears
Motor: brushed motor / Brushless	Charging time: 4-6H
Solar panel: 9V/20w 15V/20w Monocrystalline silicon	Usage time: 6-12H / 5-10H
Solar panel size: 350*400mm	Working mode: multi-function button+remote control
Battery capacity: ternary lithium battery 7.4v(11.1V)/6*3000mAh	Function mode: charging indicator light, gear display, 5v bulb output, night light with low light or strong light , USB charging interface
RPM:1100 / 1000	
Max Speed:4.5m/s	Fan size: 16 inches, height 120cm, width 42cm 18 inches, height 124cm, width 46cm
Charger: 2A adapter charger	Product color: white

Solar charging Home Adapter Charging









GL-198 16inches



Phone charging

PRODUCT PARAMETERS

Power: 20w	Gear position: 3 gears
Motor: brushed motor	Charging time: 4-6H
Solar panel: 19V/20w Monocrystalline silicon	Usage time: 6-12H
Solar panel size: 350*400mm	Working mode: multi-function button+remote control
Battery capacity: ternary lithium battery 7.4v/6*3000mAh	Function mode: charging indicator light, gear display, 5v bulb output, night light with low light or strong light , USB charging interface
RPM:1000	
Max Speed:4.5m/s	Fan size: 16 inches, height 120cm, width 45cm
Charger: 2A adapter charger	Product color: white

Solar charging Home Adapter Charging











LED Lighting supply

GL-199 16inches



Phone charging

PRODUCT PARAMETERS

Power: 20w	Gear position: 4 gears
Motor: brushed motor	Charging time: 4-6H
Solar panel: 9V/20w Monocrystalline silicon	Usage time: 6-12H
Solar panel size: 350*400mm	Working mode: multi-function button+remote control
Battery capacity: ternary lithium battery 7.4v/6*3000mAh	Function mode: charging indicator light, gear display, 5v bulb output, night light with low light or strong light, USB charging interface
RPM:1100	
Max Speed:4.5m/s	Fan size: 16 inches, height 120cm, width 45cm
Charger: 2A adapter charger	Product color: white

Solar charging Home Adapter Charging











LED Lighting supply



Phone charging

GL-199 18inches

PRODUCT PARAMETERS

Power: 25w	Gear position: 4 gears
Motor: Brushless	Charging time: 4-6H
Solar panel: 15V/20w Monocrystalline silicon	Usage time: 5-10H
Solar panel size: 350*400mm	Working mode: multi-function button+remote control
Battery capacity: ternary lithium battery 11.1v/6*3000mAh	Function mode: charging indicator light, gear display, 5v bulb output, night light with low light or strong light, USB charging interface
RPM:1000	
Max Speed:4.5m/s	Fan size: 18 inches, height 124cm, width 49cm
Charger: 2A adapter charger	Product color: white

Solar charging Home Adapter Charging











LED Lighting supply



Phone charging

GL-388 16/18inches

PRODUCT PARAMETERS

Power: 20w / 25w	Gear position: 3 gears
Motor: brushed motor / Brushless	Charging time: 4-6H
Solar panel: 9V/20w 15V/20w Monocrystalline silicon	Usage time: 6-12H / 5-10H
Solar panel size: 350*400mm	Working mode: Button shift+remote control
Battery capacity: ternary lithium battery 7.4v(11.1v)/6*3000mAh	Auxiliary functions: USB interface, night light lighting+ mosquito light， 5v bulb output
RPM:1100 / 1000	
Max Speed:4.5m/s	Fan size: 16 inches, height 120cm, width 42cm 18 inches, height 124cm, width 49cm
Charger: 2A adapter charger	Product color:White, white+orange

GENLUX
NERGY
POWERING TOMORROW, TODAY

Solar charging Home Adapter Charging









Phone charging

GL-188 16inches

PRODUCT PARAMETERS

Power: 25w	Gear position: 3 gears
Motor: Brushde motor	Charging time: 4-6H
Solar panel: 9V/20w Monocrystalline silicon	Usage time: 6-10H
Solar panel size: 350*400mm	Working mode: Button shift
Battery capacity: ternary lithium battery 7.4v/6*3000mAh	Auxiliary functions: USB interface, night light lighting
RPM:1100	Fan size: 16 inches, height 120cm, width 45cm
Max Speed:4.5m/s	Product color: Black, blue+white, orange+white
Charger: 2A adapter charger	

Solar charging Home Adapter Charging











LED Lighting supply

Phone charging

GL-588 16/18inches

PRODUCT PARAMETERS

Power: 25w / 30w	Gear position: 4 gears
Motor: brushed motor	Charging time: 4-6H
Solar panel: 9V/20w 15V/20W Monocrystalline silicon	Usage time: 6-12H / 5-10H
Solar panel size: 350*400mm	Working mode: Button shift+remote control
Battery capacity: ternary lithium battery 7.4v(11.1v)/6*3000mAh	Auxiliary functions: USB interface, night light lighting+ mosquito light,5v bulb output
RPM:1100 / 1000	Fan size: 16 inches, height 120cm, width 42cm 18 inches, height 124cm, width 49cm
Max Speed:4.5m/s	Product color: Grey+white, white+orange
Charger: 2A adapter charger	

GENLUX
NERGY
POWERING TOMORROW, TODAY

Solar charging Home Adapter Charging











LED Lighting supply



Phone charging

GL-168 18inches

PRODUCT PARAMETERS

Power: 15w	Charger: 2A adapter charger
Motor: brushed motor	Gear position: 3 gears
Solar panel: 9V/15w Monocrystalline silicon	Charging time: 4-6H
Solar panel size: 350*290mm	Usage time: 5-10 hours
Battery capacity: ternary lithium battery 7.4v/4*3000mAh	Working mode: knob switch gear adjustment
RPM:1000	Fan size: 16 inches, height 115cm, width 42cm
Max Speed:4.0m/s	Product color: orange+white, white

Solar charging Home Adapter Charging











LED Lighting supply



Phone charging

GL-918

PRODUCT PARAMETERS

Power: 20w	Gear: 3 gears
Motor: brushed motor	Charging time: 4-6H
Solar panel: 9V/20w Monocrystalline silicon	Usage time: 6-12H
Solar panel size: 350*400mm	Working mode: Working mode: multi-function button+ remote control
Battery capacity: ternary lithium battery 7.4v/6*3000mAh	Function mode: gear display, USB and Type-C charging interface,5v bulb output
RPM:1100	Fan size: 16 inches, height 110cm, width 40cm
Max Speed:4.5m/s	Product color: black, White
Charger: 2A adapter charger	

Solar charging Home Adapter Charging









GL-218



LED Lighting supply



Phone charging

PRODUCT PARAMETERS

Power: 25w	Gear position: 4 gears
Motor: Brushless	Charging time: 4-6H
Solar panel: 15V/20w Monocrystalline silicon	Usage time: 5-10H
Solar panel size: 350*400mm	Working mode: Button shift+remote control
Battery capacity: ternary lithium battery 11.1v/6*3000mAh	Auxiliary functions: USB interface, night light lighting+ mosquito light，5v bulb output
RPM:1000	Fan size: 16 inches, height 120cm, width 45cm
Max Speed:4.5m/s	Product color: White+grey
Charger: 2A adapter charger	

Solar charging Home Adapter Charging











GL-118 12/14/16inches



Phone charging

PRODUCT PARAMETERS

Power: 20w	Gear position: 3 gears
Motor: brushed motor	Charging time: 3-5H
Solar panel: 9V/15w Monocrystalline silicon	Usage time: 6-12 hours
Solar panel size: 350*290mm / 350*400mm	Working mode: knob switch gear adjustment
Battery capacity: ternary lithium battery 7.4v/4*3000mah ternary lithium battery 7.4v/6*3000mah	Function mode: USB charging
RPM:1100	Fan size: 12 inches, height 38.5cm, width 43cm 14 inches, height 43cm, width 48cm 16 inches, height 50cm, width 52cm
Max Speed:4.0m/s	Product color: black （Customizable colors）
Charger: 2A adapter charger	

Solar charging Home Adapter Charging











GL-128 12inches

PRODUCT PARAMETERS

Power: 15w	Charger: 2A adapter charger
Motor: brushed motor	Gear position: 3 gears
Solar panel: 9V/15w Monocrystalline silicon	Charging time: 3-5H
Solar panel size: 350*290mm	Usage time: 6-12 hours
Battery capacity: ternary lithium battery 7.4/4*3000mAh	Function mode: Button shift
RPM:1100	Fan size: 12 inches, height 49cm, width 34cm
Max Speed:3.5m/s	Product color: white (Customizable colors)

Solar charging Home Adapter Charging











LED Lighting supply



GL-T9 12inches



Phone charging

PRODUCT PARAMETERS

Power: 15w	Charger: 2A adapter charger
Motor: brushed motor	Gear position: 3 gears
Solar panel: 9V/8w Monocrystalline silicon	Charging time: 3-5H
Solar panel size: 180*270mm	Usage time: 5-10 hours
Battery capacity: ternary lithium battery 7.4v/2*3000mAh	Function mode: USB charging， 5v bulb output
RPM:1100	Fan size: 12 inches, height 49cm, width 34cm
Max Speed:3.0m/s	Product color: Green+white （Customizable colors）





PRODUCT PARAMETERS

Model:	GLST100W	GLST200W	GLST300W	GLST400W
Solar Panel:	5V/25W	5V/35W	5V/40W	5V/50W
Battery:	3.2V 15000mAh	3.2V 20000mAh	3.2V 25000mAh	3.2V 30000mAh
Led Chip:	SMD / 170PCS	SMD / 210PCS	SMD / 210PCS	SMD / 210PCS
Material:	Aluminum Die-Casting+Optical Lens			
IP Rate:	IP65			
Radar Sensing:	YES			
Charging Time:	4-6h			
Color Temperature:	3000-7500K			
Lamp Size:	240×70×275mm	280×70×315mm	325×65×358mm	355×65×405mm
Installation Height:	6-7M			
Irradiation Area:	80㎡	100㎡	150㎡	200㎡






PRODUCT PARAMETERS

Model:	GLSTD100W	GLSTD200W	GLSTD300W	GLSTD400W
Solar Panel:	5V/25W	5V/35W	5V/40W	5V/50W
Battery:	3.2V 15000mAh	3.2V 20000mAhM	3.2V 25000mAh	3.2V 30000mAh
Led Chip:	SMD / 62PCS	SMD / 69PCS	SMD / 69PCS	SMD / 69PCS
Material:	Aluminum Die-Casting+Optical Lens			
IP Rate:	IP65			
Radar Sensing:	YES			
Charging Time:	4-6h			
Color Temperature:	3000-7500K			
Lamp Size:	240×70×275mm	280×70×315mm	325×65×358mm	355×65×405mm
Installation Height:	6-7M			
Irradiation Area:	80㎡	100㎡	150㎡	200㎡




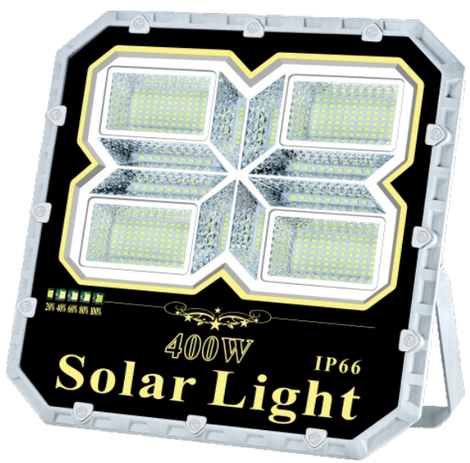

PRODUCT PARAMETERS

Model:	GLTD60W	GLTD100W	GLTD200W	GLTD300W	GLTD400W
Solar Panel:	5V/18W	5V/25W	5V/35W	5V/40W	5V/40W
Battery:	3.2V 10000mAh	3.2V 15000mAh	3.2V 20000mAhM	3.2V 25000mAh	3.2V 30000mAh
Led Chip:	SMD / 132PCS	SMD / 148PCS	SMD / 232PCS	SMD / 320PCS	SMD / 376PCS
Material:	Aluminum Die-Casting+Optical Lens				
IP Rate:	IP65				
Radar Sensing:	YES				
Charging Time:	4-6h				
Color Temperature:	3000-7500K				
Lamp Size:	228×226×58mm	270×276×58mm	318×329×63mm	380×380×65mm	430×425×68mm
Installation Height:	6-7M				
Irradiation Area:	60㎡	80㎡	100㎡	150㎡	200㎡



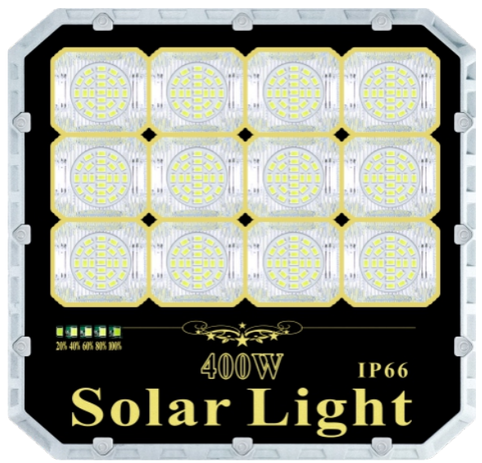


PRODUCT PARAMETERS

Model:	GLTF60W	GLTF100W	GLTF200W	GLTF300W	GLTF400W
Solar Panel:	5V/18W	5V/25W	5V/35W	5V/40W	5V/50W
Battery:	3.2V 10000mAh	3.2V 15000mAh	3.2V 20000mAh	3.2V 20000mAh	3.2V 30000mAh
Led Chip:	SMD / 128PCS	SMD / 168PCS	SMD / 168PCS	SMD / 364PCS	SMD / 376PCS
Material:	Aluminum Die-Casting+Optical Lens				
IP Rate:	IP65				
Radar Sensing:	YES				
Charging Time:	4-6h				
Color Temperature:	3000-7500K				
Lamp Size:	228×226×58mm	270×276×58mm	318×329×63mm	380×380×65mm	430×425×68mm
Installation Height:	6-7M				
Irradiation Area:	60㎡	80㎡	100㎡	150㎡	200㎡









PRODUCT PARAMETERS

Model:	GLTS30W	GLTS60W	GLTS100W	GLTS200W	GLTS300W
Solar Panel:	5V/12W	5V/18W	5V/25W	5V/35W	5V/40W
Battery:	3.2V 5000mAh	3.2V 10000mAh	3.2V 15000mAh	3.2V 20000mAh	3.2V 25000mAh
Led Chip:	SMD / 70PCS	SMD / 84PCS	SMD / 120PCS	SMD / 240PCS	SMD / 360PCS
Material:	Aluminum Die-Casting+Optical Lens				
IP Rate:	IP65				
Radar Sensing:	YES				
Charging Time:	4-6h				
Color Temperature:	3000-7500K				
Lamp Size:	200×180×42mm	228×196×45mm	270×237×45mm	318×288×50mm	350×385×55mm
Installation Height:	6-7M				
Irradiation Area:	40㎡	60㎡	80㎡	100㎡	150㎡



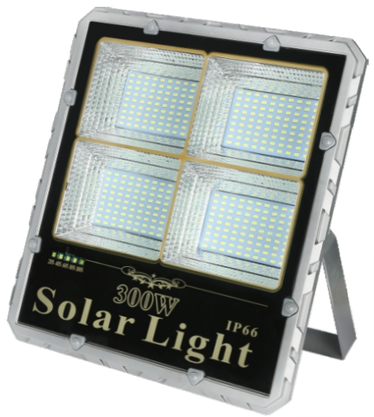



PRODUCT PARAMETERS

Model:	GLTR30W	GLTR60W	GLTR100W	GLTR200W	GLTR300W
Solar Panel:	5V/12W	5V/18W	5V/25W	5V/35W	5V/40W
Battery:	3.2V 5000mAh	3.2V 10000mAh	3.2V 15000mAh	3.2V 20000mAh	3.2V 25000mAh
Led Chip:	SMD / 70PCS	SMD / 84PCS	SMD / 120PCS	SMD / 240PCS	SMD / 360PCS
Material:	Aluminum Die-Casting+Optical Lens				
IP Rate:	IP65				
Radar Sensing:	YES				
Charging Time:	4-6h				
Color Temperature:	3000-7500K				
Lamp Size:	200×180×42mm	228×196×45mm	270×237×45mm	318×288×50mm	350×385×55mm
Installation Height:	6-7M				
Irradiation Area:	40㎡	60㎡	80㎡	100㎡	150㎡